

Always & Available Seating

7039 County Road PP, Greenleaf, WI, 54126 | (920) 864-7446 | geoff@aaseating.com



CCS 240 Express Mobile Bleachers


CCS 240 Express Mobile Bleacher is a self-contained seating system capable of highway transport and fast set-up. Bleacher unfolds to offer 10 row bleacher seating with guardrails. Bleachers are equipped with a self-contained hydraulic actuator, permitting fast, one-person set-up.

Bleachers have a rugged, galvanized steel support structure with aluminum seat and footboards. Weather resistant materials and components can be used throughout. Leveling jacks can be provided for bleacher leveling and support.

Bleachers have a constant, standard seat slope for safety and can fold to 96" wide for highway towing. Guardrails fold and unfold with the main bleacher structure, and do not require additional assembly or latching. Bleacher does not require latches or support pads to be positioned for transport.

Bleacher system can be engineered to meet or exceed IBC code requirements when equipped with optional IBC features.

	Length	Width (Depth)	Height
Bleacher Dimensions	41 ft	18ft	12ft 6in (Top Seat)
Towing Dimensions	46ft 8in (with hitch)	12ft	12ft 6in

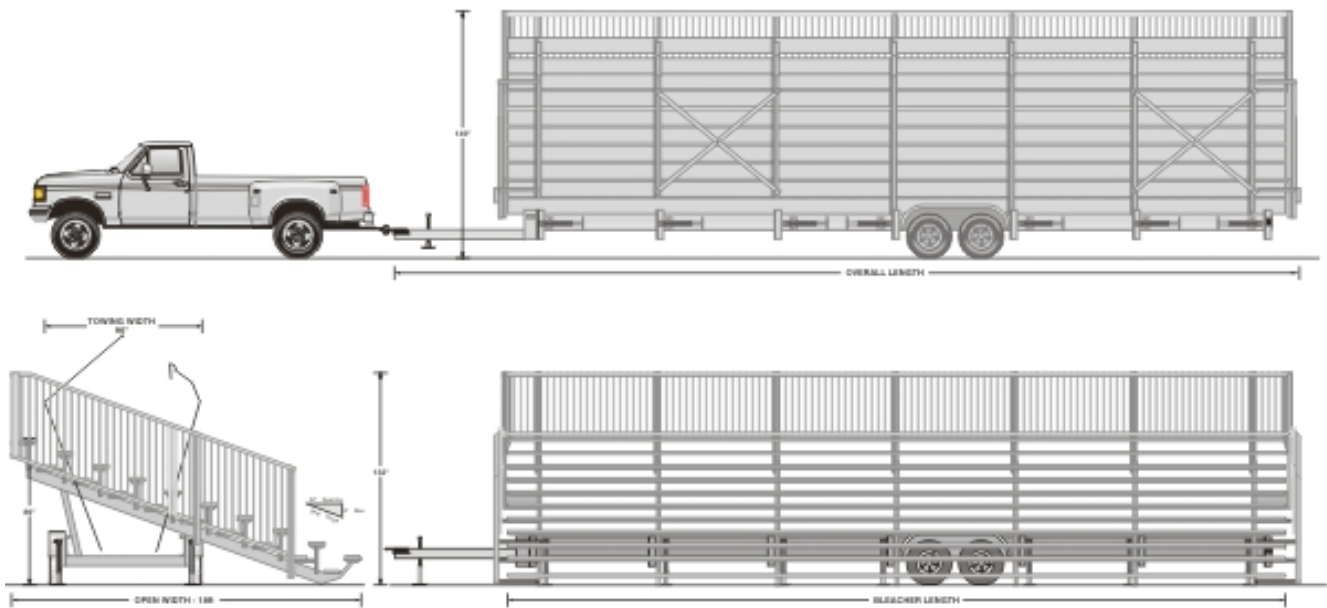

Seat Rows	10
Row Length	41 ft
Seating Capacity	240 seats - at 18" per seat
Frame	12" structural rolled steel channel, weight 25 lbs. per linear foot
Finish	All components are zinc hot-dipped galvanized (A-123) standard which is the same type of hot-dipped galvanizing that the state DOT requires on all highway signs
Seat & Foot Boards	2"x10" nominal anodized extruded aluminum; Footboards: 2" x 12" nominal anodized extruded aluminum
Guardrails	Welded steel with vertical balusters, galvanized finish
Hitch	Pintail ring coupler or 2 5/16" ball coupler, customer choice, equipped with safety chains and break-away switch (Hitch slides into bleacher, no need for removal)
Suspension	16,000 lbs. tandem axle
Brakes	Four (4) wheel electric breaks
Tires	ST235/75-16, 16.6 rim, 10 ply., load range E
Towing Electrical	ICC road and signal lights, license bracket and light, one cable and connector

Tongue Jack	10,000 lbs crank jack
Leveling Jack	Ten (10) frame mounted 7,000 lbs. swivel jacks, pivot for maximum ground clearance attached to frame with aircraft cable deter theft
Power	12VDC deep cycle battery & charger
Actuator	Self-contained hydraulic system, fluid reservoir, battery charger and remote control housed in a lockable galvanized steel compartment
Hardware	Galvanized steel and stainless steel nuts and bolts.
Spare Tire Bracket	Included with lockable plate
Rear Skid Plates	Included at the rear of the unit, enclosed
Towing Dimensions	Width – 8’ Length – 46’ 8” Height – 12’6”
Open Seat Dimensions	Width – 18’ Length – 41’ Height – 12’ 6”* *Height is to the top row of seating above ground level. Add 42” to the top of the guardrail
Operation Manual	Two (2) operation manuals are included
On-Site Training	Will be provided at the time of delivery